


ALUMINUM TEMPORARY SIGN SUPPORT SYSTEM

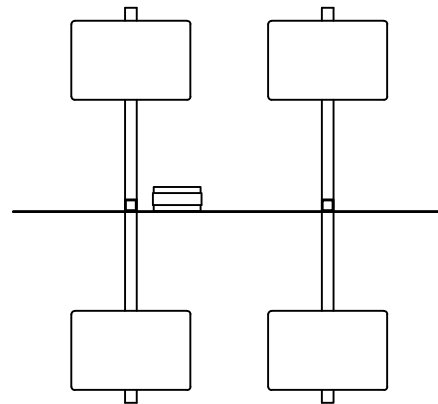

- * Vertical Upright Masts – 38 mm x 38 mm x 2.7 mm wall x 1525 mm long telespar galvanized steel
- * Legs, Horizontal Portion – 45 mm x 45 mm x 2.75 mm wall x 1520 mm long telespar galvanized steel
- * Legs, Vertical Portion – 45 mm x 45 mm x 2.75 mm wall x 300 mm long telespar galvanized steel
- * All telespar steel tubing contain 11.00 mm diameter punched holes, spaced 25.00 mm on center, along the total length
- * Vertical portion of leg is welded to horizontal portion on all four sides
- * Masts slide inside vertical portion of legs -- No bolt or fastening device used
- * Panel – Reflective aluminum, 1220 mm wide x 1220 mm long with a 2.75 mm thickness
- * Panel fastened to vertical mast supports with 7.9 mm x 57.2 mm pan head bolts
- * Light – Empco Flashing Warning Light attached to the sign panel
- * Ballast – 20.4-kg sandbag at end of each leg